

oneLED AC



oneLED AC



AC-LED spotlight with global adapter for mounting on 3-phase track.

Lightfixture body made of aluminium.

Passive cooling of the LED chip for optimum service life and reliability.


Lens and reflector that creates a well-balanced light pattern with very high efficiency.

Color: white, black or gray.



Item No.	Description	Colour	System power	Lumen-out	CCT (Kelvin)
150804-830-1201	oneLED AC, Spot 12°	Vit	20 W	1350 lm	3000 K, Ra > 80
150804-830-2401	oneLED AC, Medium 24°	Vit	20 W	1350 lm	3000 K, Ra > 80
150804-830-3801	oneLED AC, Flood 38°	Vit	20 W	1350 lm	3000 K, Ra > 80
150804-830-1202	oneLED AC, Spot 12°	Grå	20 W	1350 lm	3000 K, Ra > 80
150804-830-2402	oneLED AC, Medium 24°	Grå	20 W	1350 lm	3000 K, Ra > 80
150804-830-3802	oneLED AC, Flood 38°	Grå	20 W	1350 lm	3000 K, Ra > 80
150804-830-1203	oneLED AC, Spot 12°	Svart	20 W	1350 lm	3000 K, Ra > 80
150804-830-2403	oneLED AC, Medium 24°	Svart	20 W	1350 lm	3000 K, Ra > 80
150804-830-3803	oneLED AC, Flood 38°	Svart	20 W	1350 lm	3000 K, Ra > 80

Technical data

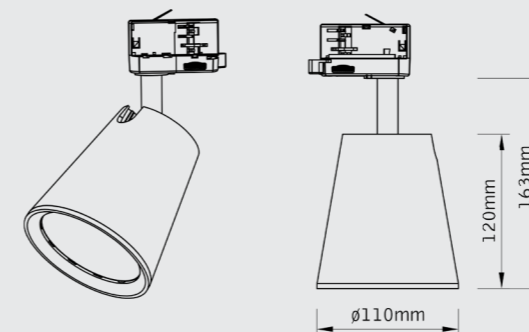

Material	Die-cast aluminium
Colour temp [K]	3000 K
Design LED life	L70 B10 > 50 000 h
CRI	> 80
Initial MacAdam	3 SDCM
Power	20 W
Nominal Voltage	230/240 V, 50 Hz
Protection class	IP 20. Class I. CE-approved