



## Pavo P

Surface mounted LED luminaire

Light distribution: direct

Optical system: opal PMMA diffuser


Housing: steel

Colour: white (RAL 9003)

Warranty 5 years

Colour: White

<b>Material</b>	Steel / Polycarbonate
<b>Colour temp [K]</b>	4000 K
<b>Design LED life</b>	L70 > 40 000 h (T <sub>a</sub> 25°)
<b>CRI</b>	+ 80
<b>Initial MacAdam</b>	3 SDCM
<b>System power</b>	18 W
<b>Lumen range</b>	1700 lm
<b>Nominal Voltage</b>	230/240 V, 50/60 Hz
<b>Form protection</b>	IP20. Class III. CE-approved
<b>Weight</b>	0,69 kg
<b>Connection</b>	3,0 Meter cable and EU plug
<b>Protection class</b>	IP44
<b>Dimensions</b>	D360 x H105 mm

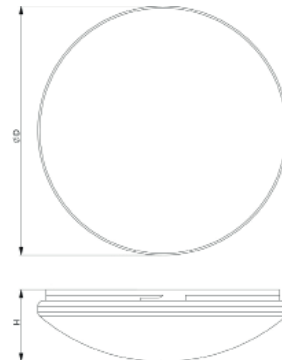

Item No.	Description	Light distribution	Painting colour	Energy consumption	Lumen output	Colour temperature, CRI
1023524	Pavo P LED1x1600 D516 T840 MW (Motion sen sensor)	Flood 90°	White	18 W	1700 lumen	4000 K, CRI > 80
1022737	Pavo P LED1x1600 D516 T840	Flood 90°	White	18 W	1700 lumen	4000 K, CRI > 80

*Caleidoscope*