




## ecoLENS in-Track

Versatile and energyefficient LED luminaire for use as general lighting using standard 3-phase track system. Easy hung directly on the track profile.


Optical lens system creating a wellbalanced light beam.

Including integrated LED track driver.

Luminaire can be rotated 355°.

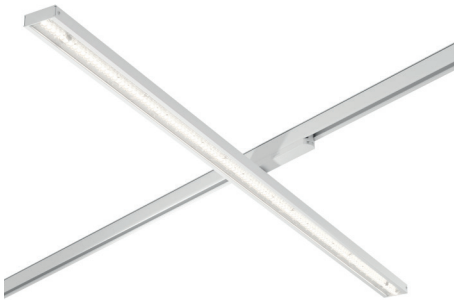

<b>Material</b>	Powder painted steel
<b>Colour temp [K]</b>	3000 K / 3500 K / 4000 K
<b>Design LED life</b>	$L_{90} > 50\,000\text{ h}(T_a 25^\circ)$
<b>CRI</b>	+80
<b>Initial MacAdam</b>	3 SDCM
<b>Lumen from 950 - 1050 mA</b>	6700 - 7700 lm
<b>Nominal Voltage</b>	230/240 V, 50 Hz
<b>Form protection</b>	IP 20. Class III. CE-approved.
<b>Dali</b>	On request
<b>Dimensions [mm]</b>	L1415 x W63 x H22 mm



Item No.	Description	Reflector /Beam	Painting colour	Energy consumption	Lumen output	EEC	Colour temperature, CRI	Amount/ Fuse 16 A C-type	Amount/Fuse 10 A C-type
231005 830 20 1002 T	ecoLENS Track, 830, Medium 60°, White	Flood	White	42 - 48 W	6700 - 7700 lm	A++	3000 K, CRI > 80	40	24
231005 835 20 1002 T	ecoLENS Track, 835, Medium 60°, White	Flood	White	42 - 48 W	6700 - 7700 lm	A++	3500 K, CRI > 80	40	24
231005 840 20 1002 T	ecoLENS Track, 840, Medium 60°, White	Flood	White	42 - 48 W	6700 - 7700 lm	A++	4000 K, CRI > 80	40	24
231005 830 20 2002 T	ecoLENS Track, 830, Medium 60°, Grey	Flood	Grey	42 - 48 W	6700 - 7700 lm	A++	3000 K, CRI > 80	40	24
231005 835 20 2002 T	ecoLENS Track, 835, Medium 60°, Grey	Flood	Grey	42 - 48 W	6700 - 7700 lm	A++	3500 K, CRI > 80	40	24
231005 840 20 2002 T	ecoLENS Track, 840, Medium 60°, Grey	Flood	Grey	42 - 48 W	6700 - 7700 lm	A++	4000 K, CRI > 80	40	24
231005 830 20 3002 T	ecoLENS Track, 830, Medium 60°, Black	Flood	Black	42 - 48 W	6700 - 7700 lm	A++	3000 K, CRI > 80	40	24
231005 835 20 3002 T	ecoLENS Track, 835, Medium 60°, Black	Flood	Black	42 - 48 W	6700 - 7700 lm	A++	3500 K, CRI > 80	40	24
231005 840 20 3002 T	ecoLENS Track, 840, Medium 60°, Black	Flood	Black	42 - 48 W	6700 - 7700 lm	A++	4000 K, CRI > 80	40	24

# Caleidoscope