



NordLED

Surface mounted waterproof LED luminaire for use in extreme temperature -40 to +50°C environments.

Light distribution type: direct

Optical system: opal polycarbonate diffuser, UV stable, impact resistant

Housing: polycarbonate

Colour: light grey


Material	Polycarbonate
Colour temp [K]	4000 K
Design LED life	L80 B10 > 100 000 h (T _a 25°)
Driver lifetime	100 000 h
CRI	+80
Initial MacAdam	3 SDCM
Lumen range max	8461 lm
Nominal Voltage	230/240 V, 50 Hz
Form protection	IP66, Class III, CE-approved
Mechanical resistance	IK10
Weight	2,6 kg
Connection	Push-in terminal, 5x2x2.5mm2

Available options

- DALIDriver with DALI interface and switch control dimming
- *note - for DALI LIN option wires are 2x0.5mm2
- CORDriver with Corridor function (never off)
- COR1minDriver with Corridor function 1min (switch off after 1 min.)
- COR30minDriver with Corridor function 30min (switch off after 30 min.)
- 1LINThrough wiring 3x1.5 mm² with two push-in terminal blocks
- 3LINThrough wiring 5x1.5 mm² with two push-in terminal blocks
- 1LIN2.5Through wiring 3x2.5 mm² with two push-in terminal blocks
- 3LIN2.5Through wiring 5x2.5 mm² with two push-in terminal blocks
- 2GStrain relief for power supply cable, 2pcs



9002154 2 x Suspension MTG KIT 1.5m

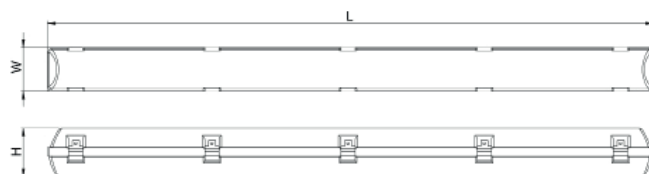

Item No.	Description	Reflector	Dimensions	Painting colour	Energy consumption	Lumen output	Colour temperature, CRI
1115209	Nord LED1x5200 G478 T840 OP LT80 IC ta-40+50C 3LIN	Opal diffuser	L 1572 x H96 x W111mm	Light grey	30,4 W	5178 lm	4000 K, CRI 80
1123050	Nord LED1x8500 G480 T840 OP LT80 IC Ta-40+50C 3LIN	Opal diffuser	L 1572 x H96 x W111mm	Light grey	49 W	8461 lm	4000 K, CRI 80
9002154	2 x Suspension MTG KIT - 1.5m						

Caleidoscope