

# zensoLED GRID


zensoLED GRID is a linear LED-luminaire with a reflector system with an optimal anti-glare function suitable for all kinds of retail applications.

Adapted for installation in grid ceiling with beam dimensions of 80x100 mm c/c 2,0 m. Other grid size on request.

Available as standard with 70° double asymmetric reflector.

7-years LED warranty.

Installation in profile / module

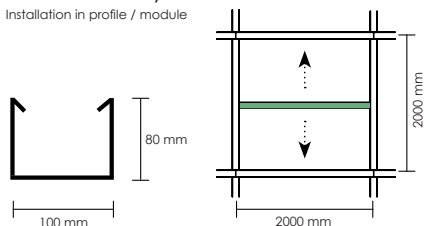

**Material**  
**Colour temp [K]**  
**Design LED life (T<sub>a</sub> 25°)**  
**Max lumen out / watt**  
**CRI**  
**Initial MacAdam**  
**Lumen range max**  
**Nominal Voltage**  
**Form protection**  
**Weight**  
**Connection**

**Dimmable**  
**Dimensions [mm]**

Powder painted steel  
 3000 / 3500 K or 4000 K  
 L90 50 000 h  
 150 lm/W  
 +80 ( + 90 on request)  
 3 SDCM  
 To be confirmed  
 230/240 V, 50 Hz  
 IP 20. Class III. CE-approved  
 To be confirmed  
 3,0 m low voltage cable to driver  
 eSAVE  
 L1900 x H50 x B35 mm

Item No.	Description	Reflector / Beam	Colour	Energy consumption	Lumen output	Colour temperature, CRI	Amount/Fuse 16 A C-type	Amount/Fuse 10 A C-type
241005 830 7070 19	zensoGRID 830, L1900, Medium 70°, White	Medium	White	To be confirmed	2777 - 7810 lm	3000 K, CRI > 80	30	18
241005 835 7070 19	zensoGRID 835, L1900, Medium 70°, White	Medium	White	To be confirmed	4400 - 7810 lm	3500 K, CRI > 80	30	18
241005 840 7070 19	zensoGRID 840, L1900, Medium 70°, White	Medium	White	To be confirmed	4400 - 7810 lm	4000 K, CRI > 80	30	18
224	csLED Driver 550-1000 mA, 3.5 m cable and plug (One driver supply 2 pcs of luminaire)			19 - 33 W	2777 - 5007 lm		15	9
220	csLED Driver 3 x 300 mA, 3.5 m cable and plug (One driver supply 3 pcs of luminaire)			10 W	1500 lm			
224e	eSAVE LED DRIVER 2x(550-1000 mA)(One driver supply 2 pcs of luminaire)			19 - 33 W	2777 - 5007 lm		15	9
161005 1800-DS	LED Driver DS 1,2-1,9 A with 3,0 M cable, EU-plug			To be confirmed	To be confirmed			
031-020-01	1,0 m (2x0,72 mm2) 2 pin EU plug + IEC C7, WHITE							
031-020-02	2,0 m (2x0,72 mm2) 2 pin EU plug + IEC C7, WHITE							
230403-9001-FM	2,0 m (2x0,5 mm2) csLED extension cable, White							

## Caleidoscope