



Bali U

Suspended LED luminaire with on/off or pull-dim function.


Light distribution type: direct

Optical system: matt micro-prismatic PMMA diffuser, low-glare

Housing: steel

Colour: white (RAL9003S)

Material	Steel / Polycarbonate
Colour temp [K]	3000 K / 4000 K
Design LED life	L80 B10 > 50 000 h (T _a 25°)
CRI	+ 80
Initial MacAdam	3 SDCM
System power	25,7 W
Lumen range	3137 lm
Nominal Voltage	230/240 V, 50/60 Hz
Form protection	IP20. Class III. CE-approved
Weight	3,08 kg
Connection	Push-in terminal, 5x2,5 mm ²
Protection class	IP40
Dimensions	L1136 x W 56 x H 68 mm

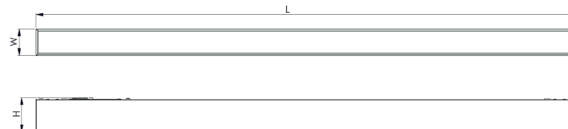

9002149
Suspension MTG KIT SUSI



Item No.	Description	Light distribution	Painting colour	Energy consumption	Lumen output	Colour temperature, CRI
1123034	Bali U LED1x3300 G294 T830 DPRZ LT80 PULLDIM	Flood 90°	White	25,7 W	3137 lumen	3000 K, CRI > 80
1114124	Bali U LED1x2450/1450 G324 T830 DPRZ LT80 LG3	Flood 90°	White	18,5 W	2282 lumen	3000 K, CRI > 80
9002149	Suspension MTG KIT SUSI					

Caleidoscope