



Levanto UGR, IP44

Recessed mounted LED panel with selectable output from the separate driver. Including quick connection cables between LED panel and driver.

3,0 m main power cable with 2-pin europlug.

Light distribution type: direct

Optical system: micro-prismatic diffuser, PS, back-lit, UGR index ≤ 19


Housing: aluminum. Protection class IP44.

Colour: white, RAL9016

Warranty 5 years

Colour: White

| | |
|-------------------------|---|
| Material | Aluminium / Polycarbonate |
| Colour temp [K] | 4000 K |
| Design LED life | L80 B10 > 50 000 h (T ₀ 25°) |
| CRI | + 80 |
| Initial MacAdam | 3 SDCM |
| System power | 18/21/23/25/28 W |
| Lumen range | 2660/3030/3350/3670/4030 LM |
| Nominal Voltage | 230/240 V, 50/60 Hz |
| Form protection | IP20. Class III. CE-approved |
| Weight | 1,8 kg |
| Connection | 3,0 Meter cable and EU plug |
| Protection class | IP44 |
| Dimensions | L595 x W595 x H33 mm |

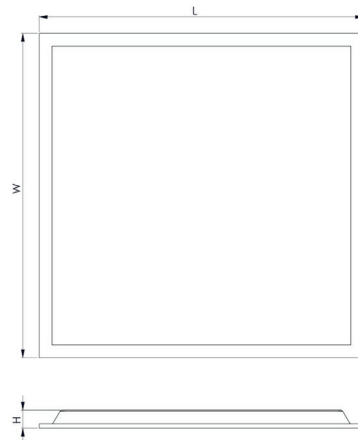

| Item No. | Description | Light distribution | Painting colour | Energy consumption | Lumen output | Colour temperature, CRI |
|----------|---|--------------------|-----------------|--------------------------|-------------------|-------------------------|
| 1123040 | Levanto UGR LED 1x3650 G673 T840MPRZ,IP44,Schuko-3M | Flood 90° | White | Select driver * | 2660 - 4030 lumen | 4000 K, CRI > 80 |
| 9037827 | LED Driver Levanto, 3,0 M cable with 2-pin europlug | | | 18 / 21 / 23 / 25 / 28 W | | |

Caleidoscope