



zensoLED 260

zensoLED is a linear LED-luminaire with good glare control achieved due to the deep open reflector design.

Luminaire is adapted for recessed installation in T24 grid ceiling structure with frame 600x600 mm.

4 luminaires can be connected to Kaleidoscope LED-driver type ref. 224. Each channel shall be minimum loaded with 2 pcs of luminaires using the including Y-splitter to the LED driver 224.

Lumen range can be adjusted directly on the LED-driver 224 from 1363 - 2417 lumen.


An 2,0 meter pre-installed cable between luminaire and LED-driver is included. Additional 2,0 m extension cables are available.

Available with 70° open silver coated reflector.

7-years warranty

Material (housing)	Powder painted steel
Colour temp [K]	3000 K / 3500 K / 4000 K
Design LED life (T_a 25°)	L90 > 50 000 h
Driver lifetime	100 000 h
CRI	+80
Initial MacAdam	3 SDCM
Lumen range max	2417 lm
Energy	17 W
Nominal Voltage	230/240 V, 50 Hz
Form protection	IP 20. Class III. CE-approved
Connection	2,0 meter low voltage cable
Dimensions [mm]	L595 x W95 x B24 mm
LED-driver	224 (ON/OFF) 224e (eSAVE)

**Y-splitter (230403-9001-YY)
to connect 2 luminaires on
each channel**

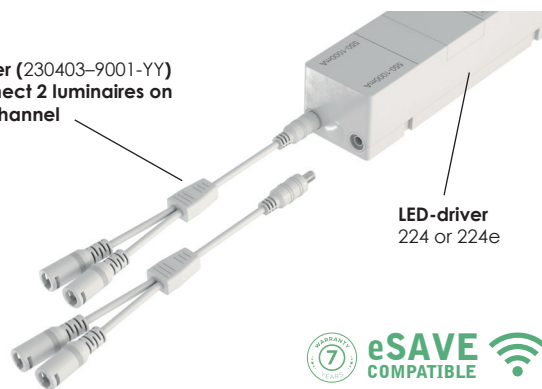

**LED-driver
224 or 224e**



Item No.	Description	Reflector /Beam	Colour	Energy consumption	Lumen output	Colour temperature, CRI	Amount/Fuse 16 A C-type	Amount/Fuse 10 A C-type
241005 830 7070 60 01	zensoLED 260, 830, White	Flood 70°	White	9.5 - 17 W	1363 - 2417 lm	3000 K, CRI > 80	60	36
241005 830 7070 60 02	zensoLED 260, 830, Grey	Flood 70°	Grey	9.5 - 17 W	1363 - 2417 lm	3000 K, CRI > 80	60	36
241005 830 7070 60 03	zensoLED 260, 830, Black	Flood 70°	Black	9.5 - 17 W	1363 - 2417 lm	3000 K, CRI > 80	60	36
241005 835 7070 60 01	zensoLED 260, 835, White	Flood 70°	White	9.5 - 17 W	1363 - 2417 lm	3500 K, CRI > 80	60	36
241005 835 7070 60 02	zensoLED 260, 835, Grey	Flood 70°	Grey	9.5 - 17 W	1363 - 2417 lm	3500 K, CRI > 80	60	36
241005 835 7070 60 03	zensoLED 260, 835, Black	Flood 70°	Black	9.5 - 17 W	1363 - 2417 lm	3500 K, CRI > 80	60	36
241005 840 7070 60 01	zensoLED 260, 840, White	Flood 70°	White	9.5 - 17 W	1363 - 2417 lm	4000 K, CRI > 80	60	36
241005 840 7070 60 02	zensoLED 260, 840, Grey	Flood 70°	Grey	9.5 - 17 W	1363 - 2417 lm	4000 K, CRI > 80	60	36
241005 840 7070 60 03	zensoLED 260, 840, Black	Flood 70°	Black	9.5 - 17 W	1363 - 2417 lm	4000 K, CRI > 80	60	36
	LED drivers							
224	csLED LED DRIVER 2x(550-1000 mA) ON/OFF						30	18
224e	eSAVE LED DRIVER 2x(550-1000 mA)						30	18
	Cables and splitters							
230403-9001-YY	Y-splitter, 2xFemale, 1xMale, White							
031-010-C8C7-1M	1,0 m [2x0,72 mm2] C8 + C7, White							
031-020-01	1,0 m [2x0,72 mm2] 2 pin EU plug + IEC C7, WHITE							
031-020-02	2,0 m [2x0,72 mm2] 2 pin EU plug + IEC C7, WHITE							

Caleidoscope