



## charaLED Pendelum

Suspended LED pendelum equipped with 3-phase -adaptor for easy installation on power tracks.


Light distribution type: direct. Optical system: faceted aluminium reflector, clear PMMA diffuser.

Housing: aluminium. Colour: black, RAL9005S Suspended (cap and cable included). Other colours on request.

Cable, 1.5m, 3x0.75mm<sup>2</sup>

**Material (housing)**  
**Colour temp [K]**  
**Design LED life (T<sub>a</sub> 25°)**  
**Driver lifetime**  
**CRI**  
**Initial MacAdam**  
**Lumen range max**  
**Energy**  
**Nominal Voltage**  
**Form protection**  
**Connection**  
**Dimensions [mm]**

Powder painted steel  
 3000 K / 4000 K  
 L80 B10 > 50 000 h  
 50 000 h  
 +90  
 3 SDCM  
 1200 lm - 3254 lm  
 17 W - 42 W  
 230/240 V, 50/60 Hz  
 IP 20. Class I. CE-approved  
 1,5 m cable with 3-phase adaptor  
 ø 315 x H300 mm

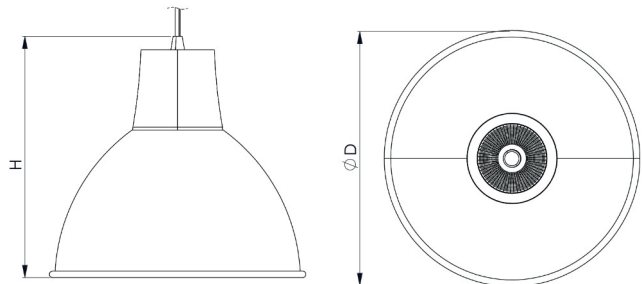

Item No.	Description	Reflector /Beam	Colour	Energy consumption	Lumen output	Colour temperature, CRI
1115597-TRACK	charaLED Pendelum, 3000 K, 1170 lm	Flood 60°	Black	13,1 W	1170 lm	3000 K, CRI > 90
1115599-TRACK	charaLED Pendelum, 3000 K, 2179 lm	Flood 60°	Black	26,4 W	2179 lm	3000 K, CRI > 90
1115601-TRACK	charaLED Pendelum, 3000 K, 3087 lm	Flood 60°	Black	42,1 W	3087 lm	3000 K, CRI > 90
1115602-TRACK	charaLED Pendelum, 4000 K, 1233 lm	Flood 60°	Black	13,1 W	1233 lm	4000 K, CRI > 90
1115604-TRACK	charaLED Pendelum, 4000 K, 2297 lm	Flood 60°	Black	26,4 W	2297 lm	4000 K, CRI > 90
1115606-TRACK	charaLED Pendelum, 4000 K, 3254 lm	Flood 60°	Black	42,1 W	3087 lm	4000 K, CRI > 90

*Caleidoscope*